





STANDARD SUPPORT GRIPS



Rod Closing Support Grips are suitable for permanent installations. The rod may become bent from high loads but grips are often reusable, after the rod is straightened. Rod closing has the lowest gripping ability of split closure methods but is the fastest and easiest to install. Installation may be difficult at high angles of weave (maximum cable diameter within listed range). Rod does not touch the cable at any point, preventing cuts. Rod is provided.



G

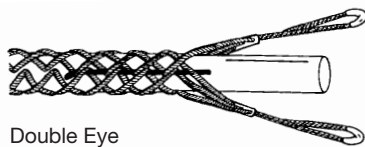

Cable Range	Part #	Description	Approx.* Breaking Strength	Length	
				Eye	Mesh
Rod closing – Double Eye – Single Weave					
.50-.62	2203-001	RR050-DE	770	4	11
.63-.74	2203-002	RR062-DE	1150	4	11
.75-.99	2203-003	RR075-DE	1320	4	14
1.00-1.24	2203-004	RR100-DE	1920	5	15
1.25-1.49	2203-005	RR125-DE	1920	5	16
1.50-1.74	2203-006	RR150-DE	1920	5	18
1.75-1.99	2203-007	RR175-DE	3150	6	20
2.00-2.49	2203-008	RR200-DE	3360	6	22
2.50-2.99	2203-009	RR250-DE	3360	6	24
3.00-3.49	2203-010	RR300-DE	7520	8	26
3.50-3.99	2203-011	RR350-DE	7520	8	28
Rod closing – Single Eye – Single Weave					
.50-.62	2203-013	RR050-SE	770	7	11
.63-.74	2203-014	RR062-SE	960	8	11
.75-.99	2203-015	RR075-SE	1320	8	14
1.00-1.24	2203-016	RR100-SE	1680	9	15
1.25-1.49	2203-017	RR125-SE	1680	10	16
1.50-1.74	2203-018	RR150-SE	1680	12	18
1.75-1.99	2203-019	RR175-SE	2640	14	20
2.00-2.49	2203-020	RR200-SE	3760	16	22
2.50-2.99	2203-021	RR250-SE	3760	18	24
3.00-3.49	2203-022	RR300-SE	6560	21	26
3.50-3.99	2203-023	RR350-SE	6560	24	28
Rod closing – Offset Eye – Single Weave					
.50-.62	2203-025	RR050-OFS	770	4	11
.63-.74	2203-026	RR062-OFS	960	4	11
.75-.99	2203-027	RR075-OFS	960	4	14
1.00-1.24	2203-028	RR100-OFS	1680	5	15
1.25-1.49	2203-029	RR125-OFS	1680	5	16
1.50-1.74	2203-030	RR150-OFS	1680	5	18
1.75-1.99	2203-031	RR175-OFS	2640	6	20
2.00-2.49	2203-032	RR200-OFS	3760	6	22
2.50-2.99	2203-033	RR250-OFS	3760	6	24
3.00-3.49	2203-034	RR300-OFS	5040	9	26
3.50-3.99	2203-035	RR350-OFS	5040	9	28
Rod closing – Universal Bail – Single Weave					
.50-.62	2203-037	RR050UB-18"	770	18	11
.63-.74	2203-038	RR062UB-18"	1150	18	11
.75-.99	2203-039	RR075UB-18"	1320	18	14
1.00-1.24	2203-040	RR100UB-18"	1920	18	15
1.25-1.49	2203-041	RR125UB-18"	1920	18	16
1.50-1.74	2203-042	RR150UB-18"	1920	18	18
1.75-1.99	2203-043	RR175UB-18"	3150	18	20
2.00-2.49	2203-044	RR200UB-18"	3360	18	22
2.50-2.99	2203-045	RR250UB-18"	3360	18	24
3.00-3.49	2203-046	RR300UB-18"	5280	18	26
3.50-3.99	2203-047	RR350UB-18"	5280	18	28

All mesh is available as double weave or stainless steel. Consult factory for availability.